

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 October 2001 (25.10.2001)

PCT

(10) International Publication Number  
**WO 01/80164 A2**

(51) International Patent Classification<sup>7</sup>: **G06K 7/10**

(21) International Application Number: **PCT/US01/12636**

(22) International Filing Date: **18 April 2001 (18.04.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
**60/197,709** **18 April 2000 (18.04.2000)** **US**

(71) Applicant (for all designated States except US): **METRO-LOGIC INSTRUMENTS, INC.** [US/US]; 90 Coles Road, Blackwood, NJ 08012 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ROCKSTEIN, George, B.** [US/US]; 210 Princeton Road, Audubon, NJ 08106 (US). **WILZ, David, M., Sr.** [US/US]; 10 Orion Way, Sewell, NJ 08080 (US). **KOLIS, George, J.** [US/US]; 5037 Jackson Avenue, Pennsauken, NJ 08110 (US).

(74) Agents: **MILLET, Marcus, J.** et al.; Lerner, David, Littenberg, Krumholz & Mentlik, LLP, 600 South Avenue West, Westfield, NJ 07090 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

[Continued on next page]

(54) Title: **MULTI-CHANNEL SCANNING SYSTEM WITH COMMON DECODER**

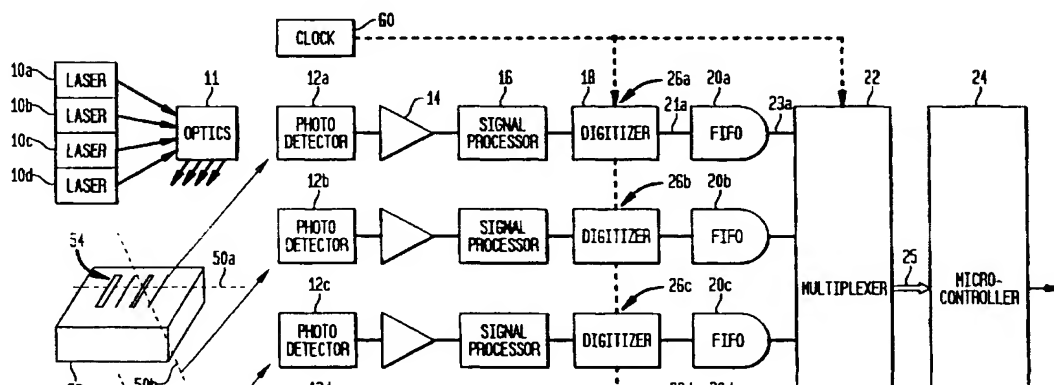



**Published:**

*without international search report and to be republished  
upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## Multi-Channel Scanning System With Common Decoder

### CROSS-REFERENCE TO RELATED APPLICATIONS

The present application claims the benefit of U.S. Provisional Patent Application No. 60/197,709 filed April 18, 2000 under 35 U.S.C. Section 119(e).

### TECHNICAL FIELD

The present invention relates to optical scanners such as bar code scanners.

### BACKGROUND OF THE INVENTION

Optical scanners are widely used for reading data encoded in symbols on various items. One common application of optical scanning is in reading of one-dimensional bar code symbols such as Universal Product Code ("UPC") symbols and other symbols in which information is represented by a set of marks in the form of parallel lines and spaces between the marks. Optical scanners are also used to read two-dimensional bar code symbols such as the PDF417 code in which information is represented by a rectilinear pattern of marks and spaces in the form of blocks, such that the pattern as a whole resembles an irregular checkerboard. Most commonly, the marks are dark and hence have low reflectivity, whereas the spaces are light and hence have high reflectivity.

Optical scanners typically operate by directing a beam of light from a source such as a laser onto the object bearing the symbol and detecting the intensity of the reflected light. The scanner typically incorporates optical elements which focus the beam of light to a relatively small spot at the object bearing the symbol and which move the optical elements so as to sweep the spot of light in a predetermined scanning path across the object as, for example, in a series of parallel lines referred to as "raster". These scanners also include a photodetector such as a photodiode or phototransistor which receives the light reflected from the object. As the spot of light moves over the object and

encounters light and dark areas on the surface of the object, the  
35 photodetector is exposed to reflected light from the spot and  
hence is exposed to light reflected from points on object surface  
along the scanning path. The amount of light reflected to the  
photodetector varies with the reflectivity of the object surface  
at different points along the scanning path and the electrical  
40 signal produced by the photodetector varies correspondingly.  
Similar effects can be achieved by optical elements which limit  
the field of view of the photodetector to only a small spot so  
that the photodetector is exposed only to the light reflected by  
the object surface at the spot, and which sweep that spot along  
45 the desired scanning path. Some scanners use both techniques, so  
that both the illumination and the field of view of the  
photodetector are limited to the same spot, and that spot is  
swept along the scanning path.

The variations in the electrical signal from the  
50 photodetector typically are converted by known analog processing  
circuitry into a digital signal having a first or "space" value,  
(e.g., 0) when the spot is on a point having high reflectivity  
and having a second or "mark" value (e.g., 1) when the spot is  
focused on a point having low reflectivity. The digital values  
55 occurring at successive times represent the signal of the  
photodetector at successive times and hence representing the  
reflectivity of the object surface at successive points along the  
scanning path. The digital signal typically is converted by a  
unit referred to as a "digitizer" to a series of transition data  
60 elements, each such transition data element including data  
denoting the occurrence of a transition from the mark value to  
the space value or vice-versa, and the time interval since the  
previous transition. Each such time interval represents the  
width of a mark (dark region) or a space (light region) on the  
65 object being scanned. Because the time interval data commonly  
is obtained by counting cycles of a digital clock between  
transitions, the time interval data is commonly referred to as

bar or space "count" data. These values are supplied to a decoder which uses known algorithms to recover from such values the information denoted by the symbol, such as numbers in the case of a UPC code.

Many bar code scanners perform several scans along different paths at different locations and/or at different orientations. For example, to read a one-dimensional bar code, the scanning path must extend across the bars rather than parallel to the bars. When objects bearing one-dimensional bar codes are presented in random orientation relative to the scanner, using several different scanning paths at different orientations relative to the scanner increases the probability that at least one scan path will be oriented correctly relative to the code on each object. Also, the scanner may provide scanning paths at different distances from the scanner, so that objects presented at different distances from the scanner can be successfully scanned.

Such multi-path scanners commonly use multiple photodetectors. For example, one holographic bar code laser scanner disclosed in commonly owned U. S. Patent 5,984,185 uses multiple lasers and a separate photodiode associated with each laser. Similar scanners are disclosed in U.S. Patent Application Serial No. 09/251,568, filed February 17, 1999 and U. S. Patent Application Serial No. 08/573,949 filed December 18, 1995, now abandoned. The contents of the foregoing applications and patent are incorporated herein by reference.

Typically, a separate set of components including a photodiode, an analog processing circuit, digitizer and decoder is associated with each laser. Such a set of components is referred to as a "channel". The decoded information from each channel is then provided as input to a multiplexing microprocessor to derive a single output. The owner of the present application has practiced this method of signal

detection, processing and decoding in its HoloTrak (registered trademark) line of holographic bar code scanners.

This approach requires that each channel have a complete set of separate circuitry, including a separate decoder for each channel. Moreover, an additional microprocessor or other multiplexing device must be provided to combine the decoded information from the plural channels into a single stream of decoded data for delivery to a host computer or other device which uses the decoded information. These factors add to the size and cost of the scanner. Thus, still further improvement would be desirable.

#### DISCLOSURE OF THE INVENTION

One aspect of the invention provides a scanner for scanning objects bearing codes such as bar codes. A scanner according to this aspect of the invention desirably includes a plurality of input channels, each said channel including a photodetector. Each input channel is arranged to provide data elements representing light impinging on the photodetector of such channel. The scanner also includes means for exposing the photodetectors of said channels to light from objects to be scanned so that the light impinging on the photodetector of each channel represents an optical property of objects to be scanned at a series of points along a scanning path associated with such channel. As in a conventional scanner, the means for exposing most typically includes one or more light sources such as one or more lasers, together with optical elements for forming the emitted light from the sources into a plurality of scanning beams, each focused at a spot, and for moving the spot of each beam along a scanning path. The photodetectors typically are arranged to receive light reflected from objects at the scanning paths, so that the light impinging on each photodetector at various times represents the reflectivity of the object surface at points along the path.

The scanner according to this aspect of the invention most preferably includes data stream means for outputting a stream of data elements including data elements from the plural channels. The scanner further includes a decoder operative to examine the stream of data elements and recover information denoted by the data elements in the stream. In a particularly preferred arrangement, only one such stream of data elements is provided to only a single decoder. Because the same decoder handles data from several input channels, it is not necessary to provide separate decoders for each individual channel. This tends to reduce the size and cost of the scanner. Also, where a single decoder is used, there is no need for additional elements to combine the outputs from multiple decoders.

The data stream means desirably includes individual FIFO buffers associated with individual input channels so that data elements from each channel are stored in the FIFO buffer associated with that channel, and a multiplexer which retrieves data elements from the outputs of different FIFO buffers at different times so as to form the stream of data elements. Most preferably, each input channel includes a signal processing and digitization circuit arranged to supply the data elements as transition data elements, each such transition data element including data denoting a transition as mark-to-space or space-to-mark and data denoting the duration of an interval between successive transitions. This provides data in the form commonly used by conventional decoders. Moreover, the data is effectively run-length encoded within each channel, thus drastically reducing the number of data elements which must be handled by the buffers and multiplexer or other elements used to consolidate the data from different channels into the data stream.

Thus, in a particularly preferred arrangement, a scanner or bar code scanning system includes:

- a plurality of laser light sources;
- a plurality of optical input channels, each having,

- (a) a photodetector;
- (b) a signal processing circuit;
- 170 (c) a digitizer circuit; and
- (d) a FIFO buffer; and

a single microprocessor for receiving the output from each optical channel and decoding the output to produce bar code symbol character data.

175 A further aspect of the invention provides methods of scanning objects bearing codes such as bar codes. A method according to this aspect of the invention desirably includes the step of exposing a plurality of photodetectors, each associated with a separate input channel, to light from objects to be  
180 scanned so that the light impinging on each photodetector represents an optical property of objects to be scanned at a series of points along a scanning path associated with such photodetector. Each such input channel provides data elements representing light impinging on the photodetector of such  
185 channel.

The method further includes forming a stream including data elements from a plurality of the channels and examining the stream of data elements in a decoder and recovering information denoted by the data elements in the stream of samples. The method  
190 most typically includes the step of storing data elements from each channel, such as in a buffer associated with each channel. In this case, the step of forming a stream of data elements is performed by recovering the stored data elements from each channel, such as by operating a multiplexer to direct data  
195 elements from the buffer associated with each channel into the data stream at different times. The stream of data elements may include a plurality of separate series of data elements, the data elements within each such series being data elements from a single one of said channels. As further discussed below, this  
200 permits decoding by standard decoders arranged to operate on data



from a single channel. Methods according to this aspect of the invention provide advantages similar to those discussed above in connection with the apparatus.

#### BRIEF DESCRIPTION OF THE DRAWINGS

205 Fig. 1 is a functional block diagram depicting apparatus in accordance with one embodiment of the invention.

Fig. 2 is a simplified diagrammatic view of certain optical components used in the apparatus of Fig. 1.

210 Fig. 3 is a diagram of a stream of data elements used in operation of the apparatus of Figs. 1-2.

#### MODES FOR CARRYING OUT THE INVENTION

As shown in Figure 1, a scanner according to one embodiment of the present invention includes multiple input channels 26a, 26b, 26c, 26d. Channel 26a includes a photodetector 12a, whereas  
215 each of the other channels includes a corresponding photodetector 12b, 12c, 12d. Each photodetector 12 may be any conventional type of photodetector, such as photodiode or phototransistor, which provides an electrical signal representing light impinging on the photodetector.

220 The scanner further includes lasers 10a-10d and optical elements 11 which are arranged to direct the light from each laser into space so that the light from each laser is focused to a spot and the spot sweeps along a preselected path in space. At the time depicted in Fig. 1, the spot of light from laser 10a is  
225 sweeping along line 50a, whereas the spot of light from laser 50b is sweeping along line 50b in a different direction, and the spot of light from lasers 10c and 10d is sweeping along lines 50c and 50d, respectively. Lines 50c and 50d are disposed at a different distance from the optical elements 11 of the scanning  
230 system than lines 50a and 50b. The optical elements 11 are also arranged so that light reflected from the spot formed by light from each laser is directed into one photodetector. Thus, channel 26a and its photodetector 12a are associated with laser 10a. Optical elements 11 direct light from the spot formed by

235 laser 10a into photodetector 12a. Stated another way, the field  
of view of photodetector 12a traces the same path 50a as the spot  
of light from laser 10a. Thus, as this spot sweeps along path  
50a, photodetector 12a will be exposed to light reflected at a  
series of points along scanning path 50a associated with  
240 channel 26a. At the time depicted in Fig. 1, an object 52  
bearing a bar code 54 is disposed so that a surface of the object  
bearing the bar code is present along path 50a. Accordingly, the  
light reaching photodetector 12a will be light reflected from the  
code-bearing surface of object 52. In like manner, laser 10b and  
245 path 50b are associated with channel 26b and photodetector 12b,  
and hence the light reaching photodetector 12b will be light  
reflected from object surfaces along path 50b. Similarly, laser  
10c and path 50c are associated with channel 26c and  
photodetector 12c, whereas laser 10d and path 50d are associated  
250 with channel 26d and photodetector 12d. At the time depicted in  
Fig. 1, no object surface is present along paths 50c and 50d, and  
hence the light reaching photodetectors 12c and 12d will be  
meaningless background light. At other times, when an object to  
be scanned is presented in other positions, an object surface may  
255 be coincident with paths 50c and 50d.

Optical elements 11 may be of known type, as, for example,  
those disclosed in the aforementioned United States Patent  
5,984,185. Figure 2 presents a simplified diagrammatic view of  
such optical elements. Lasers 10a-10d and photodetectors 12a-12d  
260 are fixedly mounted to a frame (not shown) so that the light from  
each laser is directed through a spot on a disk 60 bearing  
holograms 62, 64, 66, 68, 70, and so that each photodetector  
receives light through a spot on the disk. Conventional optical  
elements such as lenses and/or mirrors (not shown) may be  
265 provided in association with the lasers and photodetectors for  
directing light to or from the holographic disk. The holograms  
focus and direct the outgoing light from the lasers, and the  
incoming light from the environment passing to each

photodetector. The disk is rotated relative to the frame, as by  
270 a motor (not shown) so the light passing from each laser 10 and  
to each photodetector 12 passes through different portions of the  
disk at different times, causing the focal spot of each laser and  
the spot viewed by each photodetector to sweep along the desired  
path. Depending on the arrangement of the holograms and  
275 associated elements, the paths swept by the spots associated with  
the various laser beams may be entirely different from one  
another or may be replicates of one another offset in time, so  
that the spot associated with each beam is at a different  
position at any given time.

280 Input channel 26a includes a pre-amplifier circuit 14, a  
signal processing circuit 16; and a digitizer for conversion to  
bar/space count data 18. Preamplifier 14 is arranged to amplify  
the electrical signals from the photodetector 12a. The output  
from the photodetector 12a and hence from preamplifier 14 is an  
285 analog signal which varies with time as the associated laser beam  
spot sweeps along path 50a and the photodetector is exposed light  
reflected from various spots on the object surface along the  
path. When the spot is aligned with a low-reflectivity, dark bar  
or mark on the object surface, the signal will be relatively low,  
290 whereas when the spot is aligned with a high-reflectivity, light  
spot, the signal will be relatively high.

Signal processor 16 of channel 26a receives this time-  
varying signal and outputs a signal which has either a first  
value (e.g., 1) denoting a mark or a second value (e.g., 0)  
295 denoting a space. In effect, signal processor 16 converts the  
analog signal to a digital mark/space signal. Signal processor  
16 can consist of a comparator which outputs the mark value when  
the analog signal is above a preset threshold and which outputs  
the space value when the analog signal is below such threshold.  
300 Such a crude circuit, however, is susceptible to errors caused by  
artifacts such as changes in intensity of the associated laser,  
differences in the reflectivity of the object surface regions

constituting the bar code, and changes in ambient light. Moreover, such a crude circuit will change the output value from mark to space or vice-versa in response to every momentary change in the analog signal, such as brief pulses caused by electrical interference or other artifacts. Numerous circuits are known in the bar code scanning art for processing the analog signals from a photodetector to provide a mark/space signal while substantially suppressing effects due to artifacts in the signal. Any such circuit can be used. One such circuit is disclosed, for example, in United States Patent 4,000,397, the disclosure of which is incorporated by reference herein.

The mark/space signal from processor 16 of channel 26a is supplied to the digitizer 18 of that channel. The digitizer is also supplied with clock pulses from a system clock 60. The digitizer monitors the mark/space signal and detects transitions in the value of such signal, from mark to space or vice-versa. The digitizer also counts clock pulses between successive transitions. When a transition occurs, the digitizer produces a transition data element including a sign value denoting the transition as either a mark-to-space transition or a space-to-mark transition, and a time value denoting the duration of an interval between the transition which has just occurred and the last previous transition. The digitizer may include, for example, a counter adapted to receive clock pulses from clock 60 and a state change circuit including one or more sets of flip-flops and logic gates which changes state in response to a transition in the mark/space signal. A first latch and reset circuit may be arranged to capture the current value in the counter, to provide the time value or count of clock pulses since the last transition, and to reset the counter to zero, in response to each operation of the state change circuit. Also, a second latch circuit may be arranged to capture the value of the mark/space signal immediately after each operation of the state change circuit, as the sign value for the transition. Other known

circuits for detecting transitions in a mark/space signal, counting clock pulses between transitions and providing the sign value for each transition are known in the art. For example, the circuitry disclosed for performing these functions shown in U.S. Patent No. 5,081,342, the disclosure of which is incorporated herein by reference, may be used.

The other channels 26b, 26c and 26d incorporate elements identical to those of channel 26a. Thus, each channel provides a succession of digital transition data elements, each such transition data element incorporating a sign value and a duration or clock count value. The data elements produced by each channel represent the light impinging on the photodetector of such channel. Each data element represents a real or spurious mark or space. Where the light impinging on the photodetector of a particular channel is light actually reflected from an object surface, the marks and spaces denoted by the data elements are real marks and spaces on the object surface. In this case, the duration or clock count value within a data element signifies the time required for the scanning spot moving along the associated scanning path to traverse the mark or space, and hence denotes the dimension of the mark or space along the scanning path.

A first-in, first-out ("FIFO") buffer 20 is associated with each channel. Thus, buffer 20a receives the succession of transition data elements from channel 26a at an input 21a connected to the digitizer 18 of channel 26a and stores these data elements. The stored data elements are supplied in the same order, at an output 23a. The buffers 20b-20d associated with channels 26b-26d operate in the same manner. A multiplexer 22 has inputs connected to the outputs of buffers 20a-20d. The multiplexer has an output connection 25. Multiplexer 22 operates cyclically. Each cycle of the multiplexer includes a sampling interval associated with each channel. During the first sampling interval of a cycle, the multiplexer conveys data elements from the output of buffer 20a, associated with channel 26a, to the

output connection 25 of the multiplexer. During the second, third and fourth sampling intervals of each cycle, the multiplexer conveys data elements from buffers 20b, 20c and 20d, respectively. Stated another way, the multiplexer retrieves or  
375 recovers data elements stored in the buffers.

As a result, a stream of data elements 80 (Fig. 3) appears at output connection 25. The stream 80 includes a series 82a of data elements A from channel 26a, followed by a series 82b of data elements B from channel 26b, which in turn is followed by a  
380 series 82c of data elements C from channel 26c, which in turn is followed by a series 82d of data elements D from channel 26d. This pattern repeats on the next cycle of the multiplexer, so that series 82d is followed by a further stream 82a' of data elements from channel 26d, and so on.

385 The output 25 of multiplexer 22 is connected to a decoder 24. The decoder may be of known type arranged to examine a series of transition data elements and recover encoded information denoted by such transition data elements. Merely by way of example, a fixed program decoder of the type sold under  
390 the designation 6-1005415/NCR-8415 may be used to recover numeric information from transition data denoting the marks and spaces of a UPC or EAN bar code. Other known fixed program decoders and programmable decoders can be used to recover numeric or alphanumeric information from transition data denoting other  
395 known one-dimensional and two-dimensional bar codes. Although a full discussion of decoders is beyond the scope of this disclosure, it should be appreciated that such decoders generally act to recognize patterns of such as the interrelationships between different mark and/or space widths within a series of  
400 such information.

Because each series of data elements 82 in the data stream 80 includes transition data elements denoting mark and space widths in the same order as they were generated by an individual channel, the same programs as conventionally used in decoding

405 information from a single channel will work in the same way with respect to data within each individual series 82. Thus, when the decoder 24 encounters a series of transition data elements representing the mark and space widths associated with a bar code in the correct order, it will supply the numeric values denoted  
410 by those data elements to a host computer or other device (not shown) connected to the output of the decoder. In the condition depicted in Fig. 1, path 50a is properly aligned with the bar code 54 on an object being scanned, and hence series 82a, derived from scanning along path 50a, will contain a proper set of  
415 transition data elements recognizable to the decoder. Series 82a', also derived from scanning along path 50a, will contain similar information. The other series will contain meaningless sequences, and hence will be ignored by the decoder.

The conventional decoder typically cannot interpret data at  
420 junctions between series. For example, the sequence of transition data elements AAAABBBB encountered at the junction between series 82a and 82b in Fig. 3 is meaningless to the conventional decoder. The transition data elements denoting a complete pattern of the type recognized by the decoder desirably  
425 are present within an individual series. In the case of a one-dimensional bar code, the maximum number of transition data elements which would represent a single complete bar code corresponds to the maximum number of meaningful marks and spaces encountered in a single line passing through the code in the  
430 direction perpendicular to the bars. Such maximum number is referred to herein as the "chain length" of the code. For a two-dimensional bar code, the chain length is the maximum number of meaningful marks and spaces encountered on a single line through the bar code in the proper direction for reading the code. The  
435 number of data elements in a single series 82 (the number of consecutive data elements from a single channel) should be greater than the chain length of the code to be read. The greater the length of each series, the greater the probability

that a sequence of transition data elements which actually  
440 represents a bar code will fall entirely within a single series.  
The maximum length of each series is determined by the size of  
the individual buffers 20.

The transition data elements from each channel do not  
represent meaningful information at all times. For example,  
445 during intervals when the boundary between hologram 60 and  
hologram 62 is passing through the beam from laser 10a and the  
optical path to the associated photodetector 12a, the laser beam  
, and/or the field of view of the photodetector, may be blocked  
or deflected away from the region in space where objects are to  
450 be read. Thus, the transition data elements from channel 26a  
representing light impinging on photodetector 12a during these  
intervals, referred to herein as "inactive intervals", do not  
represent meaningful information. Transition data elements  
representing light impinging on photodetector 12a during other  
455 intervals, referred to herein as "active" intervals, will  
represent meaningful information, if an object is present in  
correct alignment with the associated scan path 50a. Each of the  
other channels has similar active and inactive intervals. Most  
preferably, each series 82 in data stream 80 includes transition  
460 data elements from at least one complete active interval of the  
associated channel, and the transition data elements from each  
active interval of a given channel are contained within a single  
series 82 within the data stream. To assure this, the  
multiplexer 22 may be synchronized with the optical elements 11.  
465 For example, a rotary position encoder or other element  
mechanically connected to the hologram disk 60 may trigger the  
multiplexer to switch between different channels. Alternatively,  
the optical elements can be driven in synchronism with the clock  
60 which controls operation of the multiplexer.

470 The structures and methods discussed above may be varied.  
For example, the digitizer 18 of each channel can be arranged to  
convert the mark/space signal from the associated processor 16



into a series of one-bit mark or space values representing the output of the channel at preselected sampling times. These mark  
475 and space data elements can be multiplexed in the same way as the transition data elements discussed above. In this arrangement, the microcontroller or decoder 24 handles the task of detecting transitions between mark and space, and counting the duration of each mark and space, as by counting the number of data elements  
480 between transitions. This approach requires that the buffers and multiplexer handle many more individual data elements. By contrast, where the data elements are transition data elements as discussed above, the data is effectively run-length encoded and hence compressed. In a further variant, the data elements  
485 supplied by each channel may be in the form of a series of digital real numbers directly representing intensity of the light impinging on the photodetector of the channel at a series of sampling intervals. For example, the analog output of the photodetector can be passed directly to a multi-bit analog-to-  
490 digital converter. The resulting multi-bit digital values constitute the data elements. In this embodiment, the task of translating intensity values to mark/space information is also handled by the decoder. Thus, the decoder desirably is programmed to provide artifact rejection functions corresponding  
495 to those performed by the signal processors 16 as discussed above. In a further, distinctly less preferred variant, the buffers and multiplexer can be constructed to handle analog signals.

It is not essential to provide the data stream from the  
500 multiplexer with data elements from individual channels arranged in separate series as discussed above. For example, the multiplexer can be arranged to incorporate single data elements from each channel in the data stream, so that the data stream has the configuration ABCDABCD..., where A represents a data element  
505 from channel 26a, B represents a data element from channel 26b, and so on. In this approach, it is not necessary to store the

data elements prior to multiplexing. Where a mixed data stream of this nature is used, the decoder or microcontroller 24 should be arranged to segregate the data elements and form separate series of data elements for pattern recognition purposes. For example, the decoder can include separate buffers for recording the incoming data elements from each channel, or separate memory locations for recording calculation results based on data elements in different series.

The FIFO buffers and multiplexer discussed above can be replaced by other data-handling elements. Merely by way of example, the data elements from the various channels can be written into a random-access memory instead of into a FIFO buffer. Provided that the system maintains a record of the memory locations where data elements from each channel are stored, or writes the data elements into memory locations in a preselected order of locations, the data elements can be read out of the memory in a data stream as discussed above by accessing the memory locations in the desired order. Any other form of memory can be used in a similar manner. However, the arrangement using FIFO buffers and a multiplexer is economical and simple to implement.

In the systems discussed above, only one stream of data elements is provided to a single decoder. However, where the capacity of the decoder is insufficient to handle all of the data from all of the various channels, two or more data streams can be provided to two or more decoders. At least one of these data streams should include data from multiple channels, and the number of decoders should be fewer than the number of channels. As will be appreciated, any number of channels can be provided in the scanner.

The holographic optical components discussed above are merely exemplary. The optical components may include other conventional elements such as fixed and/or moving mirrors, lenses and combinations of these. It is not essential to provide a

separate source of illumination such as a laser 10 or other light source for each channel; the light from a single source can be split into multiple beams, so that a single source of illumination such as a laser, light emitting diode or lamp serves  
545 as the light source for all of the channels. Also, the invention can be applied in systems where one or more light sources provide illumination over a large region in space and the field of view of the photodetector in each channel is limited to a spot associated with such channel. In this arrangement as well,  
550 conventional optical components act to sweep the field of view of each photodetector in a preselected pattern. Indeed the invention can be applied in systems where the spot associated with each channel is fixed relative to the housing of the apparatus and scanning action is achieved by moving objects  
555 bearing symbols to be scanned relative to the housing. Also, in each of the systems discussed above, the photodetectors are exposed to light reflected from the object surfaces. However, the optical components may be arranged so that light is transmitted through a wall of an object to be scanned en route to  
560 the photodetectors. In this case, the light will vary in accordance with the transmissivity of the object wall, rather than the reflectivity. Other bar code scanners may be arranged to use light emitted by the object as, for example, where the bar code is present as a fluorescent marking, so that the  
565 photodetectors are exposed to light representing the intensity of fluorescence. The invention can be applied in scanners which use any optical property.

As these and other variations and combinations of the features discussed above can be utilized without departing from  
570 the present invention, the foregoing description of the preferred embodiments should be taken by way of illustration rather than by way of limitation of the invention as defined by the claims.

## INDUSTRIAL APPLICABILITY

The invention can be applied in various industries including  
575 wholesale and retail trade.

## WHAT IS CLAIMED IS:

1. A bar code scanning system, comprising:

a plurality of laser light sources;

580 a plurality of optical input channels, each having,

(a) a photodetector;

(b) a signal processing circuit;

(c) a digitizer circuit; and

(d) a FIFO buffer; and

585 a single microprocessor for receiving the output from each optical channel and decoding the output to produce bar code symbol character data.

2. A scanner comprising:

590 (a) a plurality of input channels, each said channel including a photodetector, each such channel providing an data elements representing light impinging on the photodetector of such channel;

(b) means for exposing the photodetectors of said channels  
595 to light from objects to be scanned so that the light impinging on the photodetector of each channel represents an optical property of objects to be scanned at a series of points along a scanning path associated with such channel;

(c) data stream means for accepting data elements from each  
600 channel and outputting a stream of data elements including data elements from said plurality of channels; and

(d) a decoder operative to examine said stream of data elements and recover information denoted by the data elements in said stream.

605

3. A scanner as claimed in claim 2 wherein said data stream means is operative to store data elements from each channel, retrieve the stored data elements and form said stream from the retrieved data elements.

610

4. A scanner as claimed in claim 3 wherein said data stream means is operative to provide said stream of data elements so that said stream includes a plurality of series of data elements, the data elements within each such series being data elements from a single one of said channels.

615

5. A scanner as claimed in claim 4 wherein said data stream means is operative to provide said stream of data elements so that series of data elements from different channels are provided in alternating sequence, with a series of data elements from one channel followed by another series of data elements from a different channel.

620

6. A scanner as claimed in claim 4 wherein each said channel includes a signal processing and digitization circuit connected to the photodetector, the signal processing and digitization circuit of each channel supplying said data elements in digital form.

625

7. A scanner as claimed in claim 6 wherein the signal processing and digitization circuit of each said channel is arranged to supply said data elements as transition data elements, each such transition data element including data denoting a transition as mark-to-space or space-to-mark and data denoting the duration of an interval between successive transitions.

630

635

8. A scanner as claimed in claim 7 wherein the signal processing and digitization circuit of each channel includes (i) a signal processing circuit having an analog input connected to the photodetector and having an output and (ii) a digitizer having an input connected to the output of the signal processing circuit.

640

9. A scanner as claimed in claim 5 wherein said data stream means includes a FIFO buffer associated with each said channel and having an input connected to the processing and digitization circuit of such channel and an output, said data stream means further including a multiplexer having inputs connected to the outputs of the FIFO buffers associated with all of said channels and an output connected to said processor.

10. A scanner as claimed in claim 5 wherein at least one of said channels is a partially-active channel having active and inactive intervals, said exposing means being arranged so that data elements from each such partially-active channel for at least a part of each said inactive interval do not represent meaningful data, and wherein said data stream means is operative to provide the data elements for each said active interval of each said partially-active channel in a single series of data elements within said stream.

11. A method of scanning objects bearing codes comprising:

(a) exposing a plurality of photodetectors, each associated with a separate input channel, to light from objects to be scanned so that the light impinging on each photodetector represents an optical property of objects to be scanned at a series of points along a scanning path associated with such photodetector ;

(b) operating each such input channel to provides data elements representing light impinging on the photodetector of such channel;

(c) forming a stream of said data elements including data elements from a plurality of said channels; and

(d) examining said stream of data elements in a decoder and recovering information denoted by the data elements in said stream of data elements.

12. A method as claimed in claim 11 further comprising storing data elements from each channel, the step of forming a stream of data elements being performed by recovering said stored data elements from each channel and providing a plurality of series a plurality of series of data elements, the data elements within each such series being data elements from a single one of said channels.

13. A method as claimed in claim 12 wherein said series of data elements from different channels are provided in alternating sequence in said stream of data elements, with a series of data elements from one channel followed by another series of data elements from a different channel.

14. A method as claimed in claim 12 further comprising processing and digitizing the signals from each said photodetector within the channel associated with such photodetector, so that the data elements from each channel are in digital form.

15. A method as claimed in claim 12 wherein said data elements from each channel are transition data elements, each such transition data element including data denoting a transition as mark-to-space or space-to-mark and data denoting the duration of an interval between successive transitions for such channel.

16. A method as claimed in claim 12 wherein said data elements from each channel are mark and space values each representing light impinging on the photodetector of such channel at a given time.

17. A method as claimed in claim 12 or claim 13 wherein each said channel is associated with a separate FIFO buffer, and wherein said step of storing data elements includes inputting the



data elements from each said channel to the FIFO buffer associated with such channel in temporal order, and wherein said step of forming said data stream includes outputting samples from one of said FIFO buffers at a time.

715


18. A method as claimed in claim 11 or claim 12 or claim 13 wherein said step of forming said stream of data elements is conducted so that data elements from all of said channels are included in said stream, and wherein only a single decoder is used to examine said stream.

720

19. A method as claimed in claim 13 wherein at least one of said channels is a partially-active channel having active intervals and inactive intervals, said exposing step being conducted so that data elements from each such partially-active channel for at least a part of each said inactive interval do not represent meaningful data, and wherein said step of forming said stream of data elements is conducted so that the data elements for each said active interval of each said partially-active channel is provided in a single series of data elements within said stream.

730

FIG. 1

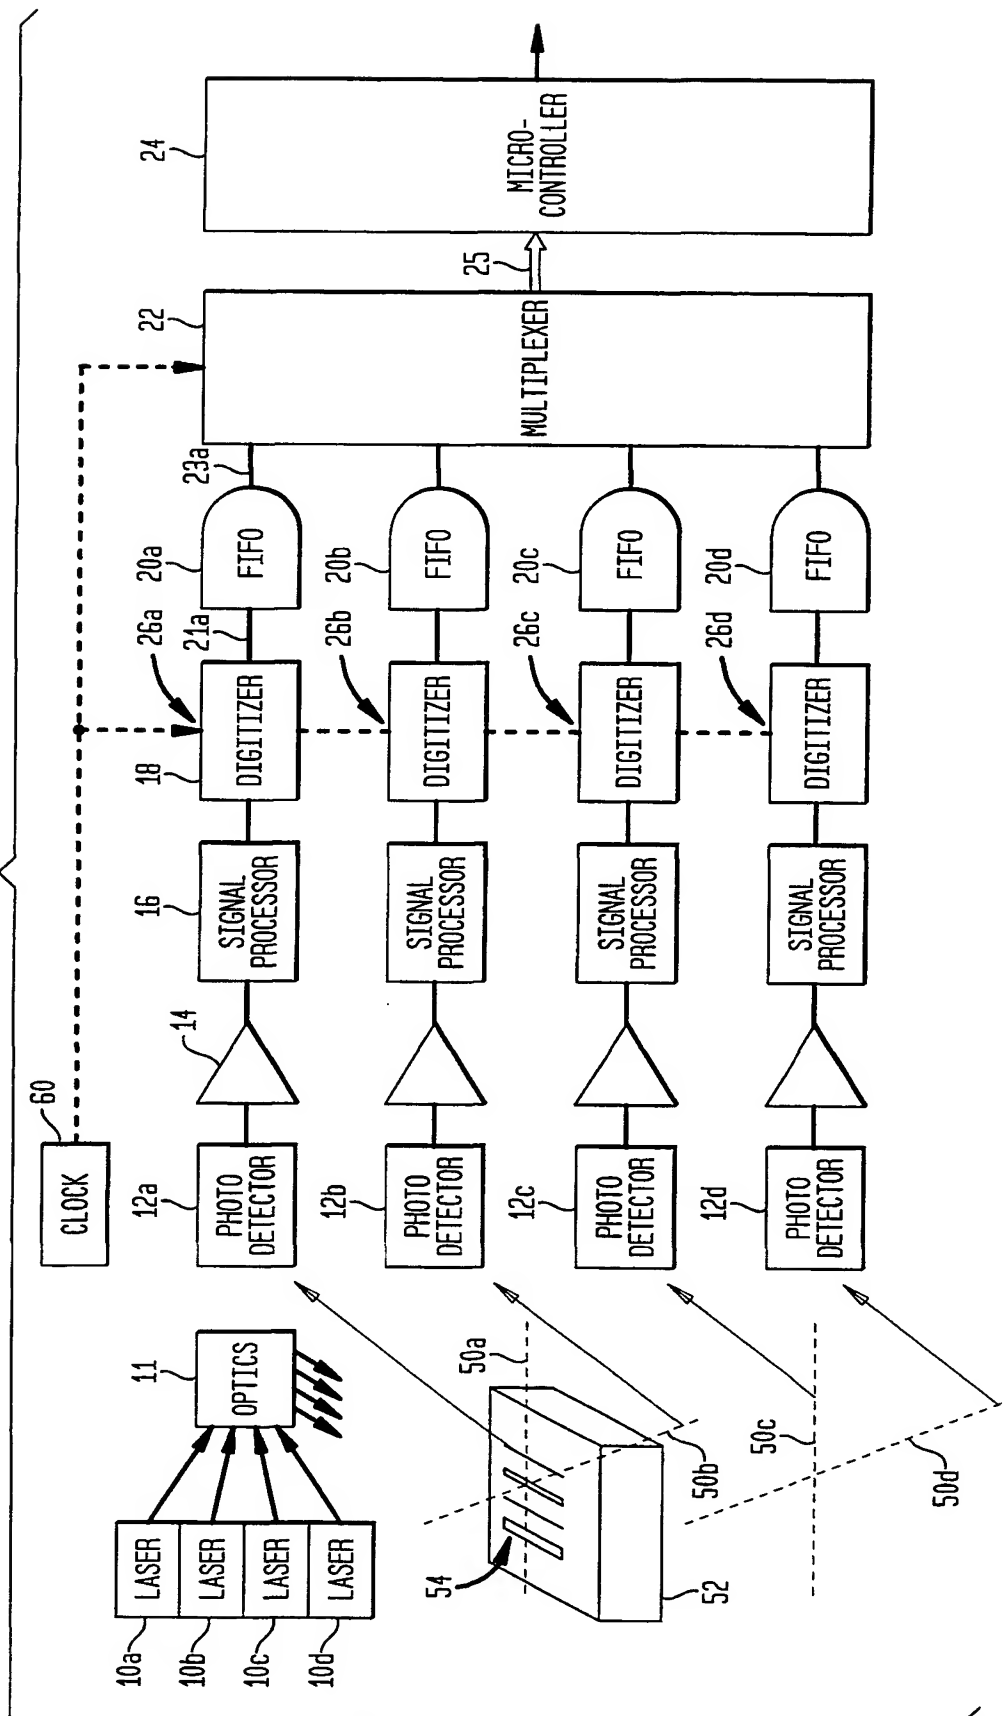

2/2

FIG. 2


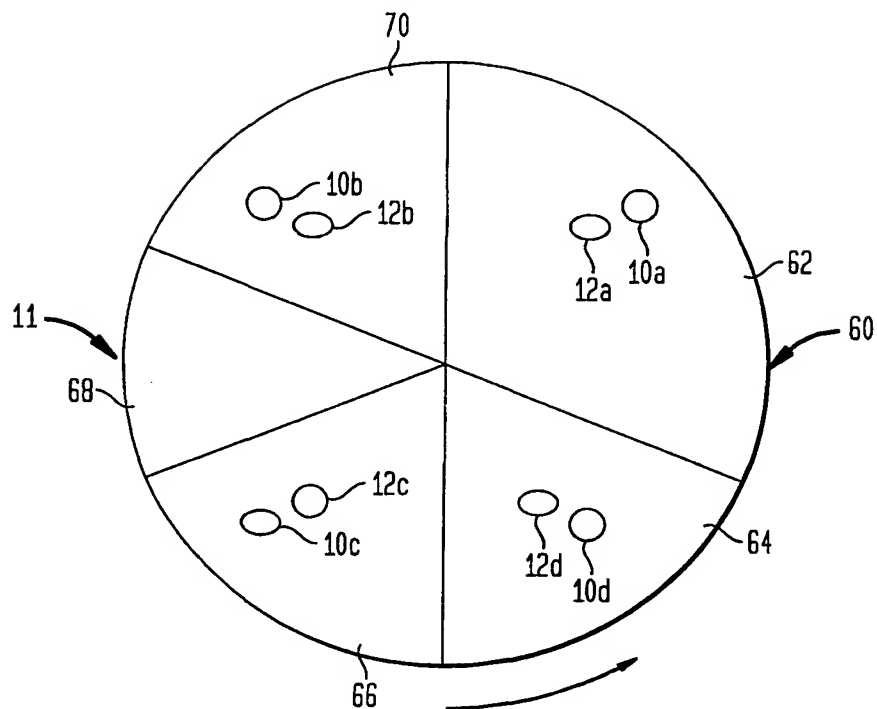


FIG. 3



(19) World Intellectual Property Organization  
International Bureau

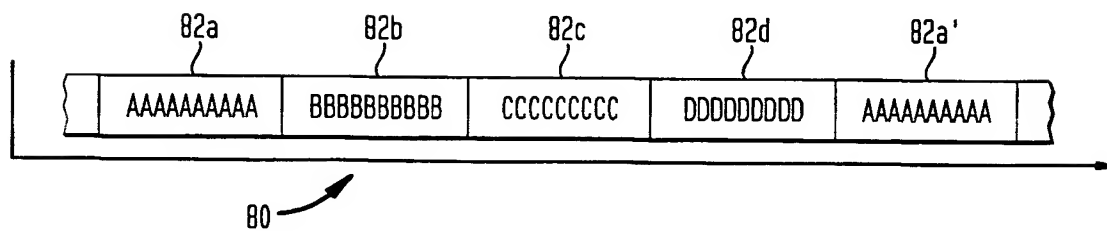

(43) International Publication Date  
25 October 2001 (25.10.2001)

PCT

(10) International Publication Number  
**WO 01/80164 A3**

(51) International Patent Classification<sup>7</sup>: G06K 7/10, 7/14

(74) Agents: MILLET, Marcus, J. et al.: Lerner, David, Littenberg, Krumholz & Mentlik, LLP, 600 South Avenue West, Westfield, NJ 07090 (US).

(21) International Application Number: PCT/US01/12636

(22) International Filing Date: 18 April 2001 (18.04.2001)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/197,709 18 April 2000 (18.04.2000) US

(71) Applicant (*for all designated States except US*): METRO-LOGIC INSTRUMENTS, INC. [US/US]; 90 Coles Road, Blackwood, NJ 08012 (US).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): ROCKSTEIN, George, B. [US/US]; 210 Princeton Road, Audubon, NJ 08106 (US). WILZ, David, M., Sr. [US/US]; 10 Orion Way, Sewell, NJ 08080 (US). KOLIS, George, J. [US/US]; 5037 Jackson Avenue, Pennsauken, NJ 08110 (US).

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


**Declarations under Rule 4.17:**

*as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations*

*as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

[Continued on next page]

(54) Title: MULTI-CHANNEL SCANNING SYSTEM WITH COMMON DECODER

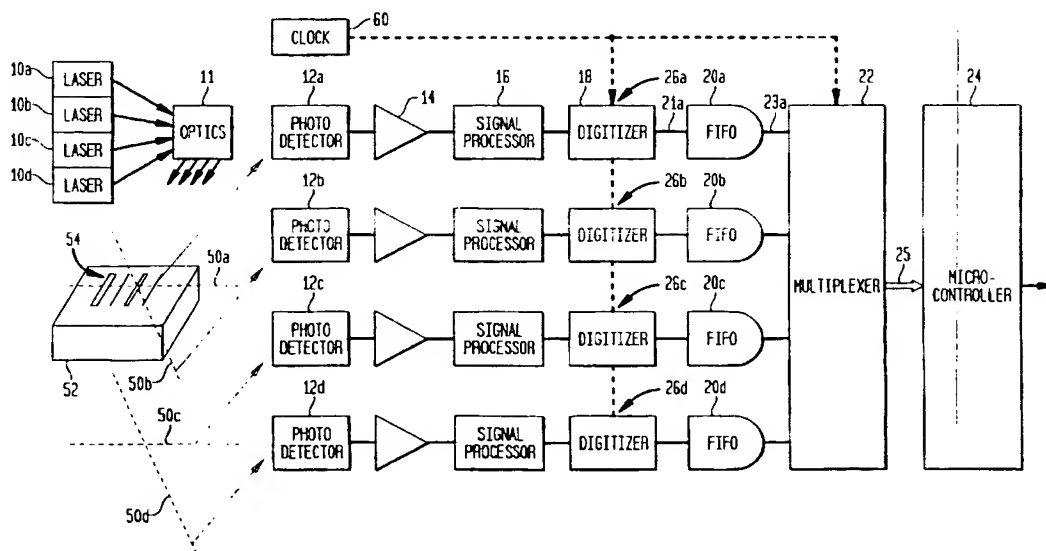

(57) Abstract: A multi-channel scanner having several photodetectors (12a-12d) and several lasers (10a-10d) for scanning along multiple paths (50a-50d) incorporates a separate input channel (26a-26d) for each photodetector. Each channel provides a sequence of data elements representing light reflected from points along the associated scanning path, and the data elements from each channel are stored in separate FIFO buffers (20a-20d). A multiplexer (22) takes data elements from the various buffers so as to form a consolidated stream of data elements (80) incorporating the data elements from the various channels. This stream is processed in a single decoder (24) to recover data denoted by the bar code. Use of a single decoder minimizes the cost and size of the system.



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(88) Date of publication of the international search report:**

4 April 2002

## PATENT COOPERATION TREATY

PCT

NOTIFICATION CONCERNING  
DOCUMENT TRANSMITTED

From the INTERNATIONAL BUREAU

To:

Commissioner  
US Department of Commerce  
United States Patent and Trademark  
Office, PCT  
2011 South Clark Place Room  
CP2/5C24  
Arlington, VA 22202  
ETATS-UNIS D'AMERIQUE  
in its capacity as designated Office

Date of mailing (day/month/year)

25 October 2001 (25.10.01)

International application No.

PCT/US01/12636

International filing date (day/month/year)

18 April 2001 (18.04.01)

Applicant

METROLOGIC INSTRUMENTS, INC. et al

The International Bureau transmits herewith the following documents and number thereof:

\_\_\_\_\_ copy(ies) of declaration(s) (Rule 47.1(a-ter))

The International Bureau of WIPO  
34, chemin des Colombettes  
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

M. OUCHOUKHI

Telephone No.: (41-22) 338.83.38

## PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

|  |   |  |
|--|---|--|
| Applicant's or agent's file reference<br><b>METLOG-005</b> | <b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below. |  |
| International application No.<br><b>PCT/US 01/ 12636</b>   | International filing date (day/month/year)<br><b>18/04/2001</b>   | (Earliest) Priority Date (day/month/year)<br><b>18/04/2000</b> |
| Applicant<br><b>METROLOGIC INSTRUMENTS, INC. et al.</b>    |   |  |

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.



It is also accompanied by a copy of each prior art document cited in this report.

## 1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.



the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :



contained in the international application in written form.



filed together with the international application in computer readable form.



furnished subsequently to this Authority in written form.



furnished subsequently to this Authority in computer readable form.



the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.



the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**.



the text is approved as submitted by the applicant.



the text has been established by this Authority to read as follows:

5. With regard to the **abstract**.



the text is approved as submitted by the applicant.



the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.



as suggested by the applicant.



because the applicant failed to suggest a figure.



because this figure better characterizes the invention.

1



None of the figures.

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/12636

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 G06K7/10 G06K7/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, WPI Data, EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No |
|----------|--|----------------------|
| X        | EP 0 527 267 A (SYMBOL TECHNOLOGIES INC)<br>17 February 1993 (1993-02-17)<br>column 13, line 11 - line 54<br>figure 5<br>---               | 1-9,<br>11-18        |
| A        | US 5 946 427 A (KANEMITSU NORIO)<br>31 August 1999 (1999-08-31)<br>column 7, line 4 -column 8, line 32<br>figure 2<br>---                  | 1-19                 |
| X        | US 5 925 869 A (HORNER NEAL WILLIAM ET AL)<br>20 July 1999 (1999-07-20)<br>column 3, line 37 -column 4, line 19<br>figure 1<br>---<br>-/-- | 2,11                 |



Further documents are listed in the continuation of box C



Patent family members are listed in annex.

## Special categories of cited documents

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

22 October 2001

Date of mailing of the international search report

30/10/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040 Tx 31 651 epo nl  
Fax (+31-70) 340-3016

Authorized officer

de Ronde, J.



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/12636

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No |
|----------|--|----------------------|
| A        | US 5 545 886 A (MAROM EMANUEL ET AL)<br>13 August 1996 (1996-08-13)<br>column 9, line 37 -column 10, line 40<br>figure 17<br>----- | 1,2,11               |

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/12636

| Patent document<br>cited in search report |   | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---|---------------------|----------------------------|---------------------|
| EP 0527267                                | A | 17-02-1993          | US 5278397 A               | 11-01-1994          |
|   |   |                     | AT 177226 T                | 15-03-1999          |
|   |   |                     | CA 2053493 A1              | 26-01-1993          |
|   |   |                     | DE 69130949 D1             | 08-04-1999          |
|   |   |                     | DE 69130949 T2             | 07-10-1999          |
|   |   |                     | EP 0527267 A1              | 17-02-1993          |
|   |   |                     | JP 3109909 B2              | 20-11-2000          |
|   |   |                     | JP 5189590 A               | 30-07-1993          |
|   |   |                     | US 5352922 A               | 04-10-1994          |
|   |   |                     | US 5506392 A               | 09-04-1996          |
|   |   |                     | US 6220514 B1              | 24-04-2001          |
|   |   |                     | US 6213399 B1              | 10-04-2001          |
|   |   |                     | US 2001001473 A1           | 24-05-2001          |
|   |   |                     | US 5332892 A               | 26-07-1994          |
|   |   |                     | US 5859417 A               | 12-01-1999          |
| <hr/>                                     |   |                     |                            |                     |
| US 5946427                                | A | 31-08-1999          | JP 8163380 A               | 21-06-1996          |
| <hr/>                                     |   |                     |                            |                     |
| US 5925869                                | A | 20-07-1999          | NONE                       |                     |
| <hr/>                                     |   |                     |                            |                     |
| US 5545886                                | A | 13-08-1996          | US 5258605 A               | 02-11-1993          |
|   |   |                     | US 5712470 A               | 27-01-1998          |
|   |   |                     | US 5663549 A               | 02-09-1997          |
|   |   |                     | US 5912450 A               | 15-06-1999          |
|   |   |                     | JP 4220786 A               | 11-08-1992          |
| <hr/>                                     |   |                     |                            |                     |